


MACHINE MODEL : TWIN PACK

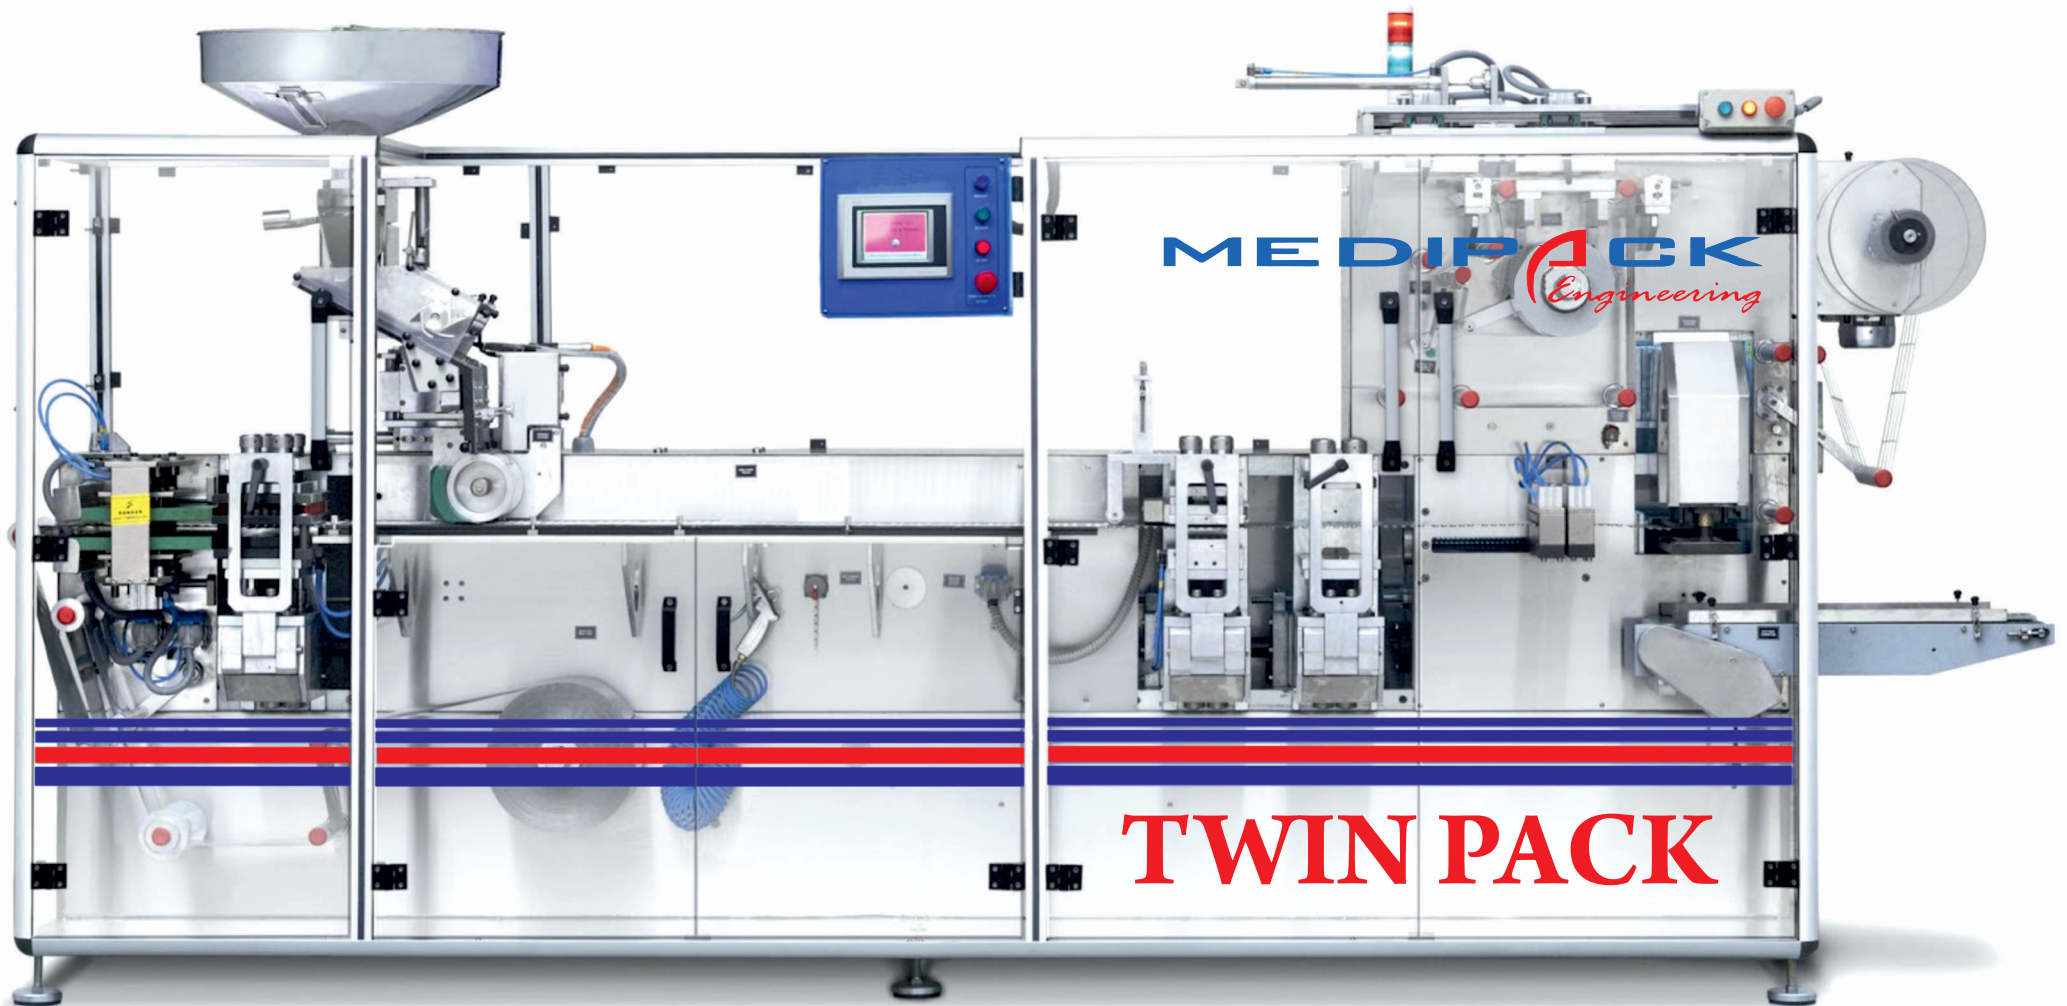

MEDIPACK ENGINEERING

MEDIPACKENG@GMAIL.COM | WWW.MEDIPACK.IN

TWIN PACK

TECHNICAL SPECIFIC DETAILS

Forming Material	Lidding material	Forming Area	Max nos. of Forming stroke
PVC/ALU ALU/ALU	Aluminium/Glassine paper with heat sealable	140 mm x 222mm	30 cycles/minute

Machine Speed (Packs)	UP TO 30 FORMING CYL/MIN (Depends upon pack size & product dimensions)
Max Forming Area	140 X 222 mm
Min Pack Size	30 X 60mm
Optimum Forming Depth	18mm
Base Foil Width	Max. 230 mm
Base foil Thickness	ALU- 0.13mm
Base foil Reel Diameter	Max. 440mm
Lidding foil Width	Max. 226 mm
Lidding foil Thickness	0.02mm/0.03mm
Lidding foil Reel Diameter	Max. 210MM
Max Core Diameter	70-76 MM
Advance Length	140 mm
Length	2904mm + 2%
Width	813 mm + 2%
Height	1825 mm + 2%

SALIENT FEATURES:

- **FORMING STATION:**
Intermitted flat forming
- **SEALING STATION:**
Intermitted flat sealing
- **ALL WORK STATIONS, SERVO MOTOR DRIVEN**
- **ALL FUNCTION BY PLC**
- **QUICK CHANGE PART CHANGE OVER**
- **FEEDING ARRANGEMENTS:**
Universal brush feeder / Dedicated feeder
- **Hi Speed Machine With Dynamic**
- **Operator Friendly**
- Change - Part Compatibility with other Machine

OPTIONAL FEATURE:

- PRC System
- Inkjet Printer System
- Blister Inspection System
- Polycarbonate Guard
- 21 CFR Part 11 Compliance

MEDI PACK ENGINEERING

MEDIPACKENG@GMAIL.COM | WWW.MEDIPACK.IN